

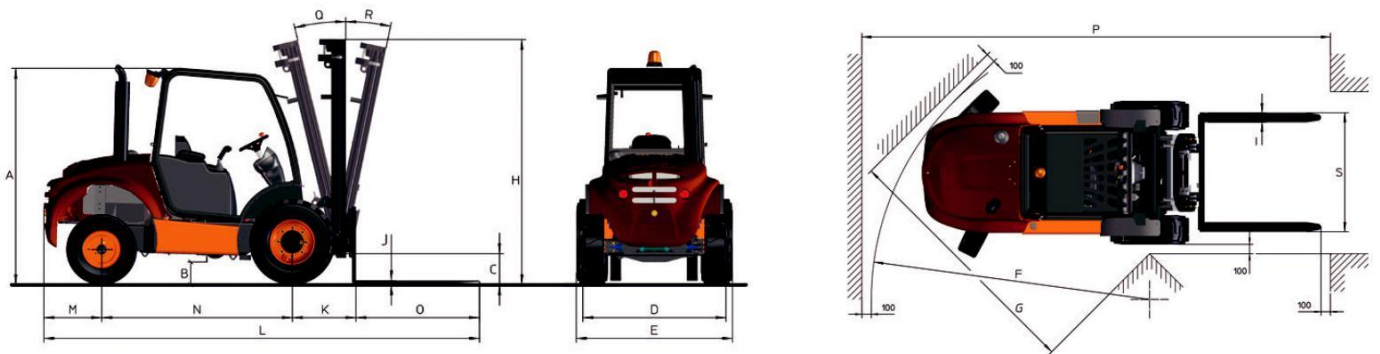

TECHNICAL DATA

| | | C 350 H M572 | C 350 H x4 M573 |
|-------------------------|--------|--|--|
| GENERAL | | | |
| Load capacity to 500 mm | Kg | 3500 | 3500 |
| Load capacity to 600 mm | Kg | 3230 | 3230 |
| Unladen weight * | Kg | 5925 | 5925 |
| Transmission | | Hydrostatic, with continuous speed control | Hydrostatic, with continuous speed control |
| MAST | | | |
| Fork carriage | | FEM 3 | FEM 3 |
| Carriage width | mm | 1260/1660 | 1260/1660 |
| ENGINE | | | |
| Make | | KUBOTA | KUBOTA |
| Model | | V2403 | V2403 |
| Power | kW | 36,5 | 36,5 |
| Operating speed | rpm | 2600 | 2600 |
| Torque | Nm@rpm | 158,6@1600 | 158,6@1600 |
| No. cylinders | | 4 | 4 |
| Emissions | | Tier4i, Stage IIIA | Tier4i, Stage IIIA |
| Ambient noise | dB(A) | 104 | 104 |
| Consumption | l/h | 5,9 | 5,9 |
| CO ₂ | Kg/h | 15,3 | 15,3 |
| DRIVING | | | |
| Max. speed | Km/h | 22 | 22 |
| Gradability | % | 30 | 30 |
| Traction | | 4x2 | 4x4 FullGrip® |
| Front tyres | | 16/70-20 | 16/70-20 |
| Rear tyres | | 27x10-12 | 10.0/75-15.3 |
| HYDRAULIC SYSTEM | | | |
| Hydraulic circuit | l/min | 70,2 | 70,2 |
| Working pressure | bar | 190 | 190 |
| TANK CAPACITY | | | |
| Fuel | l | 80 | 80 |
| Hydraulic | l | 85 | 85 |
| BRAKES | | | |
| Service | | Hydraulic, multi-disc and sealed | Hydraulic, multi-disc and sealed |
| Parking | | Mechanical, multi-disc and sealed | Mechanical, multi-disc and sealed |

* It may change due to optional equipment

DIMENSIONS

| TYPE OF MAST | Maximum lift (mm) | H | | Free lift (mm) | Load at maximum height (kg) All-terrain use | |
|--------------------|-------------------|----------------------------|---------------------------|----------------|---|-----------|
| | | Retracted mast height (mm) | Extended mast height (mm) | | Narrow axle | Wide axle |
| Duplex mast (Std.) | 3300 | 2670 | 4570 | 120 | 3500 | 3500 |
| Triplex mast | 3700 | 2130 | 4970 | 1200 | 3200 | 3500 |
| Triplex mast | 5400 | 2700 | 6670 | 1680 | - | 1600 |



| DIMENSIONS (mm) | C 350 H | C 350 H x4 |
|-----------------|---------|------------|
| A | 2220 | 2250 |
| B | 300 | 320 |
| C | 375 | 360 |
| D | 1448 | 1547 |
| E | 1790 | 1790 |
| E** | 2050 | 2050 |
| F | 3500 | 4350 |
| G | 2945 | 2985 |
| I | 120 | 120 |
| J | 50 | 50 |
| K | 725 | 710 |
| L | 4585 | 4560 |
| M | 640 | 630 |
| N | 2020 | 2020 |
| O | 1200 | 1200 |
| P | 5625 | 6460 |
| Q | 14 | 14 |
| R | 11 | 11 |
| S | 1260 | 1260 |
| S*** | 1660 | 1660 |

** Measured with high-lift mast installed carriage
 ***Measured for wide axle



Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.