




**SEMI TRAILER FLATBED WITH SIDES**  
**FOUR AXLES TWIN ASSEMBLY**  
**MECHANICAL - AIR SUSPENSION**  
**GVW : 76T PAYLOAD : 65T**

**FT-SRPR4SRJ13.01**

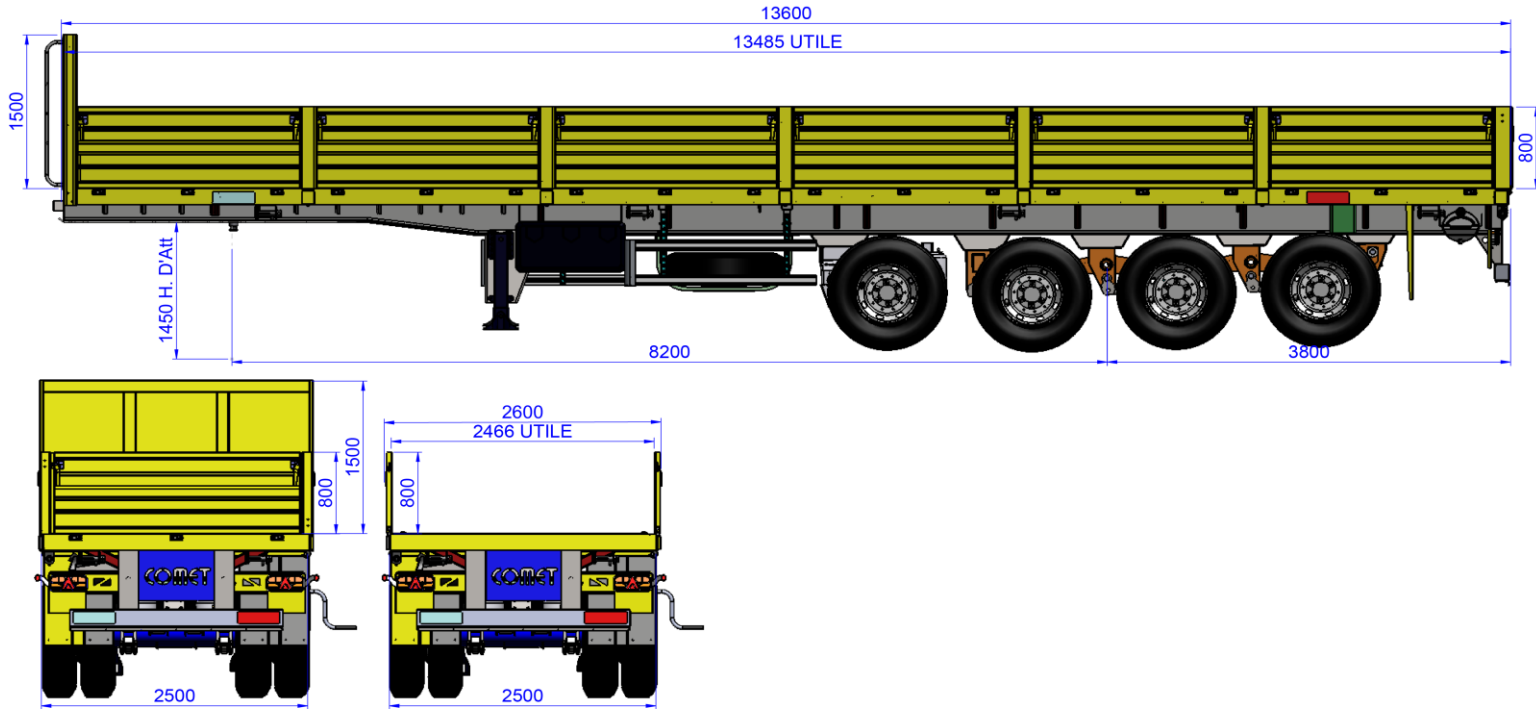

**1/ FRAME:**

Frame made of:

- Two beams IPE 450 with gooseneck conform to ISO 1726 to suit with all types of tractors.
- Ties sheet folded spacers rigidly consoles and the stringers.
- A plate coupling, 12 mm thick.

**2/ TRAY :**

Tray consists of :

- A floor plate grooved.
- A removable front panel.
- 13 side and rear panels removable and fold down, height: 800 mm.

**3/ AXLES:**

- Type 04 Axles.
- Four axles, tubular body 13 Tons.
- Mechanical drum brakes, controlled by cam S.
- In accordance with CE standards.

**4/ RUNNIG GEAR:**

- 03 axles with mechanical suspension
- 06 multi-leaf springs in manganosiliceous steel.
- 01 lift axle with air suspension.
- In accordance with CE standards.

(\* ) Weight and dimensions subject to derogation at your expense for use in certain countries.

**5/ BRAKING:**

- Compressed air braking of **European** origin, **WABCO** brand, two-line with automatic corrector, in accordance with CE standards. Cam control provided by manual adjustment lever.
- Manual Park brakes with cable.

**6/ LIGHTING AND SIGNALING:**

- Lighting and signaling system of **European** origin, **ASPÖCK** brand.
- conform to the highway code and
- In accordance with CE standards.

**7/ COUPLING:**

- Mechanical landing gear **JOST** brand with two speeds:
  - Lifting capacity: 24T.
  - Static capacity: 50T.
- Dismantling kingpin 2" interchangeable at 3 1/2" **JOST** brand.

**8/ PNEUMATICS:**

- Sixteen (16) Tires (tubeless) 315/80 R 22.5 or 13R22.5.
- Twin assembly, on a disc wheel 9\*22.5.

**9/EQUIPMENTS :**

- 01 Back bumper anti-fitting.
- 01 Pare –cycle conform to the highway code.
- 01 double Spare wheel supports.
- 01 Spare wheel.
- 09 Roller clamp
- Hooks on the sides.
- 01 Toolbox **DAKEN** brand.
- 01 Water reservoir with soap maker 32 L **TAKLER** brand.
- 02 Rear protection wings with mud flaps.
- 12 Twist locks for 20' or 40' container.
- Wheel lever Key.
- Maintenance guide.

**10/ PRESENTATION AND PAINTING:**

- Full Shot blasting
- Application:
  - 02 high quality primary layers
  - 02 layers of high quality finishing paint, available in all colors.

**11/ OPTIONS:**

- ABS.

**To comply with the UEMOA code the payload will be :**  
**41+20% = 53.2T**