


DAILY

65C15/E4 D Twin Rear Wheels

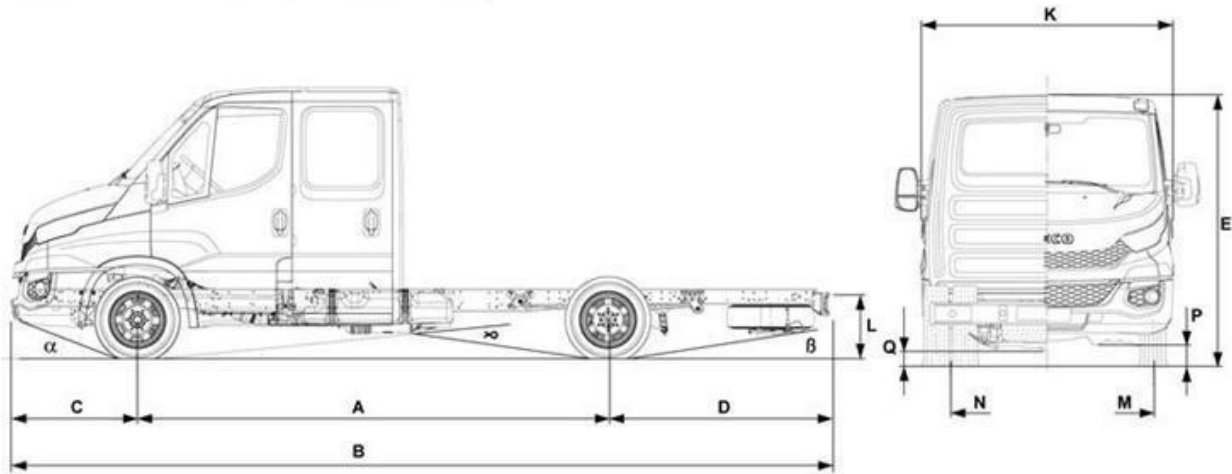

Dimensions (mm)

A	Wheel base	3450	3750	4100	4350
B	Maximum Length (#)	5943	6553	6953	7373
C	Front Overhang			1008	
D	Rear Overhang (#)	1485	1795	1845	2015
E	Max Chassis Cab width			2052	
	Front Axle / Rear Cab			2105	
	Front axle/Front Body			2160	
K	Overall Height (Unladen)	2350	2350	2350	2350
M	Front Track			1723	
N	Rear Track			1661	
L	Unladen Frame Height at Rear of Frame	678	675	678	688
P/Q	Front/Rear Ground Clearance			171/165	
	Turning circle: kerb/kerb	12138	13048	14108	14866
	Turning circle: wall/wall	12782	13694	14758	15518

OPTIONAL Factory fit Fix body dimensions (mm)

Maximum vehicle Length (with standard body)	6045	6645	7148	7718
Body Length	2860	3460	3960	4550
Maximum Body Width			2300	
Side height	400	400	500	500

Weights (Kg)*

GVW			6500 ^①	
GTW			10000 ^①	
Front Axle Capacity			2300	
Rear Axle Capacity			5000	
Kerb Weight Front Axle (without Body)	1572	1587	1619	1627
Kerb Weight Rear Axle (without Body)	912	914	906	913
Kerb Weight Total (without Body)	2484	2501	2525	2540
Max Body and Payload Capacity	4016	3999	3975	3960

* Weights for chassis cab are with full fuel, oils, water, spare wheel and include driver.

(included RUP = 130mm) - Rear Underrun Protection

① GVW reduced to 6300 kgs and GCW to 9800 with fix box body

The information in this literature is intended to be of general nature only. Iveco reserves the right to modify or change specifications at any time. For more detailed information refer to your dealer.

ENGINE

Type: F1CE3481J - 4 stroke diesel cycle-Watercooled - 16 valves (4 per cylinder)
- DOHC - High Pressure Common Rail direct injection + EDC
- Turbocharger and intercooler + Wastegate - Cast-iron engine block with aluminium cylinder head - Suspended Oil Sump - Dual mass flywheel.

Integrated Vacuum and Steering Pumps. Glow plugs. Blow-by system. Basic data

Number of Cylinders	4 Vertical In Line
Bore x Stroke	95.8 mm x 104 mm
Total Displacement	2998 cm ³
Maximum Output	146 hp (107 kW) at 3000+3500 rpm
Maximum Torque	350 Nm at 1400+2600 rpm Emission according Euro 3.

TRANSMISSION

Six speeds Overdrive, synchromeshed manual transmission.
Push/Pull cable control. Gear Lever on Dashboard.
Performance rating (calculated value with standard tyres and axle ratio):

Gear	Gear Ratio	Maximum Geared Speed (Km/h)	Gradeability at GVW (%)
1°:	5,37	--	> 35
6°:	0,79	120	--

Power Take-Off

Facility for side mounted PTO. Maximum torque output: 180 Nm.

CLUTCH

Single dry plate hydraulic.
External Diameter: 279,5 mm (11").

FRAME

"C"- Section steel longitudinal side members and tubular cross members.
(Fe 420, Dimensions 184x69x5)
Anti corrosion process with full galvanized box Disc Ø mm. 301 / 2x48 - Analogue Electronic Speedometer

STEERING

L.H.D., hydraulically assisted, rack and pinion type.
Steering wheel Ø 390mm, lock.

FRONT AXLE

Independent wheels.

Rear

Semi-elliptic leaf springs and rubber rebound bumpers.
Anti-roll bar is Standard.

Shock Absorbers

Front and rear heavy duty hydraulic telescopic shock absorbers.

REAR AXLE

Rigid, bevel and crown, single reduction.
Axle Ratio Standard: 4,556

Tyres: (6+1 spare) 225/75R16

Front

New QUAD-TOR incorporating torsion bar.
Anti-roll bar is Standard.

ELECTRICAL SYSTEM

CAN Bus digital communication line.
Battery: 12V - 110 Ah
Alternator: 110A

Starter motor output: 2.3 kW.

BRAKING SYSTEM

Ventilated Disc brakes front and rear

Brake Dim.	Front	Rear	Closed
301	306	COMFORT	- new cluster with sections.

Service and Emergency

Dual circuit with vacuum servo.
Floating disc caliper with auto wear adjustment. Brake level pad front / rear wear indicators.
Asbestos free pads

Emergency brake built into the service brake system.

Parking Brake

Crew cabin (Driver + 2 Passengers) in front and 4 in rear.
- Pressed steel unitary construction body mounted on rubber bushes.
- Laminated windscreen.
- Cabin doors with large storage pockets.
- 2+2 rear cabin doors + sliding windows.
- Cabin flooring covered in one piece

synthetic mat. Adjustable sun visors.
- Rear panel with small window.
Manual brake operating on rear wheels.

ABS+EBD STANDARD


WHEELS / TYRES (Standard) Glove/storage compartments. **SUSPENSION** Climate Control (Hot/ Fresh air)

Load index: 118/116

Wheels: 6 JK - 16H

CAB

- 6 + 1 person semi-forward type

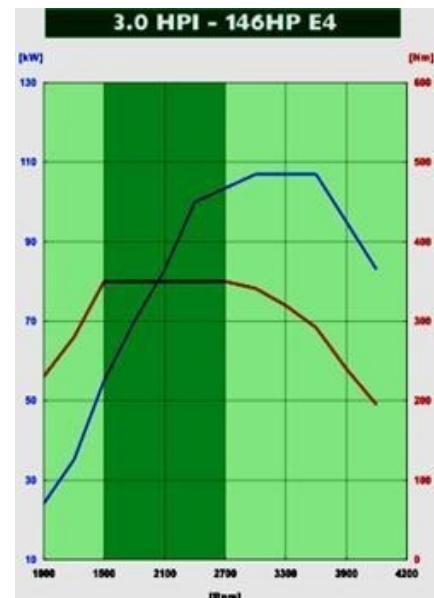

additional light in rear.

- 4 passenger bench seat in rear

with built in storage box.

- Driver seat adjustable for height, reach and rake wrap-around back support upholstered in heavy duty cloth.
- All seats with headrest+safety belts
- Outside Rear view mirrors on both

sides + integrated wide-angle mirror and turn indicators lights.

All new dash board with improved storage, cup holders, cataphoretic dipping & sections. Brake Calipers (n°xmm): 2x60

- Electronic Rev Counter
- Fuel Level Indicator with Reserve Light Indicator
- Engine Water Temperature Indicator with High Temperature Indicator Light
- Digital Display with:

- Kilometer Counter (Trip and Total)
- Clock
- Instrument Light Dimmer Switch

Spare wheel under rear overhang. 100 lts shaped fuel tank, with fuel filler on cab pillar, with key lock. Front recovery eye. Exhaust pipe with manifold longitudinally positioned on the right side with stub-pipe outlet placed within the side members.

External Badge: 65 - 150

Indicator lights to monitor all vehicle functions.
All lighting an signals EEC std.

Windshield Wipers

Cab Locking with remote control.

Other equipment

- Cabin light placed at center of ceiling with courtesy
spotlight and

Rel. 1 - 03/2015

IVECO