

IVECO T-WAY

TECHNICAL DESCRIPTION T-WAY EU 3




AT720T47WT H - ARTIC 6x6

IVECO

LIST OF LINKED VCB

VCB code	Gearbox	Wheelbase	Cabin	Drive
S3GIG2B4	I6S 2520 TO	3500	AT-SX	LH
S3GIG2D4	I6TX 2240 TO	3500	AT-SX	LH
S3GIG3B4	I6S 2520 TO	3800	AT-SX	LH
S3GIG3D4	I6TX 2240 TO	3800	AT-SX	LH

DIMENSIONS & WEIGHTS

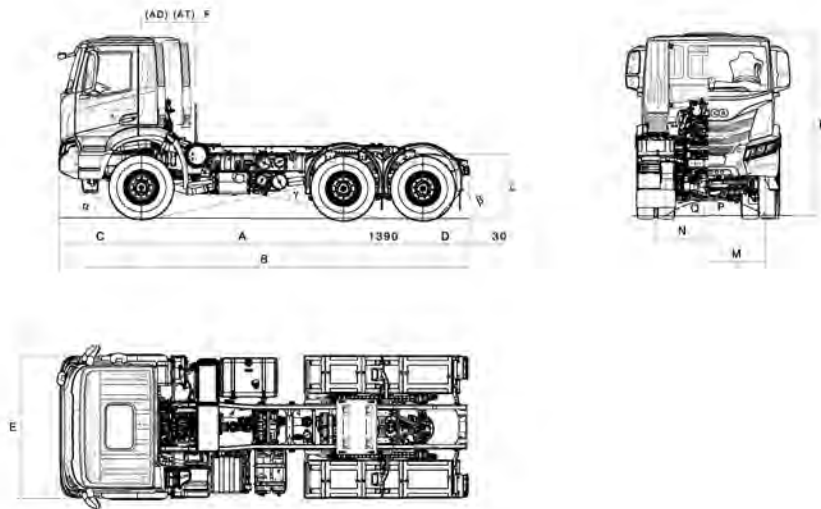

DIMENSIONS (mm)

Wheelbase (A)	3500	1390	3800	1390
Max length (B)	7169	7439		
Max width over wings (cab) (E)	2550	2550		
Front axle to back of cab - including filter (F)	940	940		
Frame height at end of frame, unladen (L)	1191	1191		
Frame height at front axle, unladen	1166	1165		
Frame height at rear axle, unladen	1185	1185		
Front overhang (C)	1440	1440		
Rear overhang (D)	780	780		
Minimum ground clearance (front) (P)	371	371		
Minimum ground clearance (rear) (Q)	311	311		
Overall height to top of cab, unladen (K)	3235	3235		
Turning diameter kerb to kerb	19400	20300		
Turning diameter wall to wall	21000	21900		
Front track (M)	1981	1981		
Rear track (N)	1831	1831		
Approach angle α (°)	34	34		
Departure angle β (°)	48	47		
Ramp angle γ (°)	23	21		
Side members thickness	10	10		
Side members max height	309	309		
Side members flange width	80	80		
Frame width at rear	776	776		

WEIGHTS (KG)

Wheelbase	3500 1390	3800 1390
Total vehicle kerb weight	10750	10830
Kerbweight on Front Axles	5838	5876
Kerbweight on Rear Axles	4912	4954
G.V.W. (EC)	26000	26000
G.V.W. (Design)	33500	33500
G.V.W.	26000	26000
Plated weight on front axle (EC)	8000	8000
Plated weight on front axle (Design)	8000	8000
Plated weight on rear axle(s) (EC)	19000	19000
Plated weight on rear axle(s) (Design)	26000	26000
Max body & payload	15250	15170
Max body & payload (Design)	22750	22670

Notes :

Weights are to standard configuration and include: chassis cab (or tractor), driver (75 kg), full fuel and Adblue tanks, tools kit and spare wheel (if present).
The values of the plated weights / GVW can vary according to the markets and local homologations.

Wheelbase	Type	Drawing
3500 1390	Left hand drive	5803033459
3800 1390	Left hand drive	5803033460


MODEL COMPONENTS

ENGINE

Identification Code	F3HGE611
Manufacturer	FPT Industrial
Commercial name	Cursor 13
Cycle	DIESEL
Injection type	DIRECT
4 Stroke / 2 Stroke cycle	4
No. of cylinders	6
Cylinders layout	IN-LINE
Bore mm	135
Stroke mm	150
Total displacement cm ³	12.882
Exhaust gas treatment	syencer
Weight (without oil / water) Kg	1230
Injection system	Common rail
Cold starting type	THERMOSTARTER
Emissions control	EURO III
Cooling system	water



ENGINE EMISSION EURO III opt. 06044

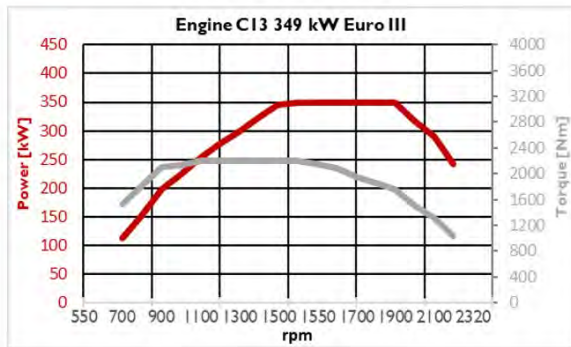

470 C13 - Cursor 13 - 470 CV - WG

Maximum power: 349 kW (475 HP) @ 1900 rpm

Maximum torque: 224 Kgm (2200 Nm) @ 1100 rpm

The central electronic system controls the following functions: Engine preheating, fuel preheating, turbo, injection control, engine brake, control of engine speed and torque, data exchange OBD with ScanTool, engine diagnostic (onandoff-board), control of blink-code and failure indicator light on dashboard, control of engine idling speed and max. engine speed, data exchange with VCM (vehiclecontrol module), supervision of emission values.

DRIVELINE

GEARBOX

Gearbox model	Gearbox Type	Installation	Box material	Dry weight Kg	Clutch type	Max input torque Nm	No. of forward gears	No. of reverse gears	Shifting
16S 2520 TO	SYNCRONIZED	ENGINE FLANGED	ALUMINIUM ALLOY	306 - (w/o retarder)	Dry clutch	2500	16	2	Manual shifting Single - H
16TX 2240 TO	AUTOMATED	ENGINE FLANGED	ALUMINIUM	290 - (w/o retarder)		2200	16	2	

GEAR RATIOS

Gearbox model	1st	2 ^a	3rd	4th	5 ^a	6	7 ^a	8	9	10	11 ^a	12.	13de	14	15th	16 ^a	R1	M.A. 2		
16S 2520 TO	13.8	11.54	9.49	7.93	6.53	5.46	4.57	3.82	3.02	2.53	2.08	1.74	1.43	1.2	1	.84	12.92	10.8		
16TX 2240 TO	14.68	12.05	9.92	8.14	6.78	5.56	4.57	3.75	3.22	2.64	2.17	1.78	1.49	1.22	1.00	0.82	14.14	11.61		

CLUTCH

Gearbox model	Type	Outer diameter mm	Outer diameter (inches)			
16S 2520 TO	Single dry plate	430	17			
16TX 2240 TO	Single dry plate	430	17			

MODEL COMPONENTS

TYRES & WHEELS

Code	Tyres	Front	Rear	Load index	Rolling circumference m
20081	Standard	13R22,5	13R22,5	156/150	3.428
20115	Optional	395/85R20	395/85R20	168/	3.6
20885	Optional	385/65R22,5	315/80R22,5	164/	3.28
20168	Optional	14,00R20	14,00R20		3.826
20795	Optional	315/80R22,5	315/80R22,5	156/150	3.28
20430	Optional	14,00R20	14,00R20		3.826
20780	Optional	14,00R20	14,00R20	160/157	3.826
20846	Optional	315/80R22,5	315/80R22,5	156/150	3.28
20216	Optional	12,00R20	12,00R20	154/149	3.42
20080	Optional	13R22,5	13R22,5	156/150	3.428

REAR AXLE RATIO

Option code	05003	06017	06019 *	06021	06034	06036
Ratio	6.09	4.23	4.67	5.01	5.56	6.57

*: Standard axle ratio

FRONT BUMPER

Steel front bumper

DISC BRAKES

DUO DUPLEX drum brake
Electronic braking system (EBS)

Front axle
Drum brakes 410 mm (410 x 180)
Friction area: 2884 cm²

Tandem
Drum brakes 410 mm (410 x 200)
Friction area: 3220 cm²

SUSPENSIONS

Front parabolic suspension STD
Standard capacity: 8.000 kg. (options for 8.500 kg and 9.000 kg.)

Rear semi elliptic parabolic suspension STD
Capacity: 26.000 kg.

AXLES

Position	Description
Front	5985/2D - Drive a. H.R. (Drum br. D.D.)
Rear	453291/2D - Tandem H.R. (Drum brake 2D)

TRANSFER BOX

Type	
Model	TC 2200
OFF ROAD Low Ratio	1.6
ON ROAD Normal Ratio	1

BATTERY

Electrics	
Voltage V	24
Alternator power V/A	28 / 90
Starter power kW	5.5
No. of batteries	2
Batteries capacity V/Ah	12 / 170

MODEL COMPONENTS

390L FUEL TANK

Fuelling

Capacity (l.)	390
Material	Aluminium

MISCELLANEOUS

THE AVAILABILITY OF THE FOLLOWING OPTIONS DEPENDS ON VERSIONS AND MARKETS :

SAFETY :

TPMS (on cluster): Tyre Pressure Monitoring System is an electronic system which monitors the air pressure inside a tyre and provides information on faults in real time to the driver. In addition to improving vehicle safety, **TPMS** helps the driver plan tyre maintenance and contributes to reducing fuel consumption.

ESP: Electronic Stability Program (ESP). The **ESP** system acts in skidding phase, by adjusting the engine power and braking on individual wheels with different intensities so as to stabilise the position of the vehicle. It is effective both in case of sudden deviations from the trajectory and in correcting situations of oversteer or understeer, which may occur in case of incorrectly approaching a bend.

LDWS: Lane Departure Warning System (LDWS). The Lane Departure Warning System beeps when the vehicle strays from the lines that mark the driving lane without the indicators being activated. The system is very effective in preventing accidents due to distraction or sleepiness.

FUEL CONSUMPTION OPTIMIZATION:

ECOSWITCH: Designed to reduce fuel consumption, **ECOSWITCH** is an important aid for the driver. It activates the "iEco program" in order to optimise gear shifting strategy and performance according to actual vehicle weight, assuring the best productivity under any operating condition.

ECO ROLL: On all type of incline (also on moderate one), the eco-roll function serves to open the driveline and retain the kinetic energy of the vehicle for longer or to slightly increase it by reducing the engine-drag torque that affects the impellers. If the vehicle subsequently slows down, the engine must increase the injected fuel quantity at a later point. Driver actions during an active rolling function such as accelerator pedal, brake actuation, changing to manual, or speed range selector actuation lead to the termination of the rolling function and the closing of the driveline. Depending upon the speed range, the last gear before the rolling phase can be engaged or a new gear can be calculated and engaged when the rolling function is terminated.

ECO ROLL works in the range (50km/h ; 92km/h) and is independent from Cruise Control setting.

GPS-PREDICTIVE DRIVING (OPT Code 78878)
GPS-predictive driving is the driving strategy implemented in TraXon with predictive functionality to determine the optimal gear early for any driving situation, according to the electronic horizon information acquired via GPS by a provider and made available on the CAN bus. The electronic horizon acquires the current location of the vehicle via GPS and determines the route from topographical street maps (uphill gradient, curves, max permissible speed). GPS-predictive driving is used to improve the gear shifting and Eco-rolling strategy.

DRIVEABILITY :

ROCKING MODE (OPT Code 78507) TRAXON provides a Rocking function to have the clutch reating directly to accelerator pedal movements for rocking the vehicle out of a depression in the terrain in low grip conditions. When the Rocking mode is activated, it is possible to disengage the clutch immediately by releasing the accelerator pedal, roll back the vehicle and engage the clutch immediately again by depressing the accelerator pedal. The HMI provided for the Rocking mode includes: a dedicated switch to let the driver activate / deactivate the Rocking mode. A specific indication on the Instrument Cluster to inform when the Rocking function is active ("ROCK" indication in the transmission modes area).

OFF-ROAD MODE is an high mobility function with which the gearshifting logic allows higher rpms before shifting to faster gears, thus providing higher engine power and torque.

CREEPING MODE is an high mobility function with which the vehicle moves forward at minimum speed, simply by releasing the service brake pedal, useful for precise maneuvering operations at low speed (active via Quick Menu).



IVECO