


Specifications - MERCEDES-BENZ 818 L 4X2 4220 Chassis cabin

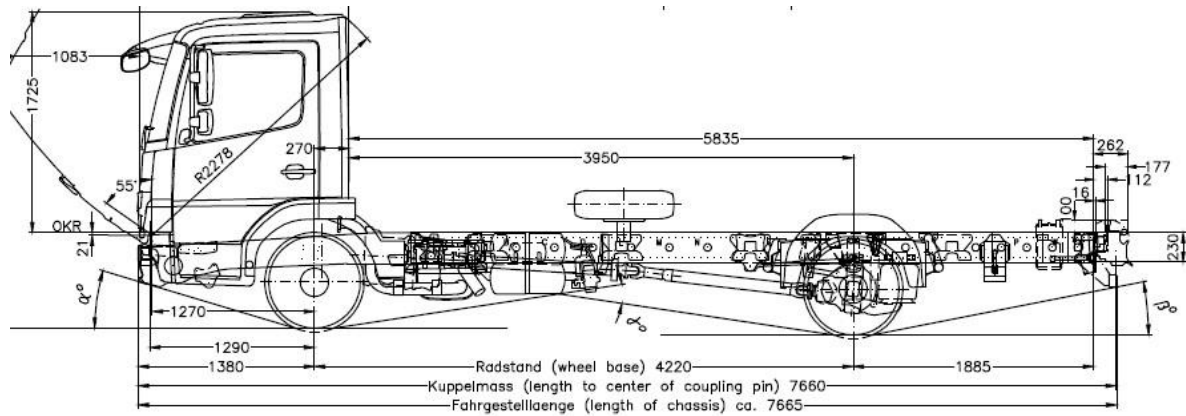

Model:

Model:	Mercedes-Benz Atego
Vehicle type:	818 L
Drivetrain:	4X2
Baumuster:	97021512
Chassis variant:	Chassis
Cab:	S-Cab
Engine power:	130 kW (177 HP)
Wheelbase:	4220 mm
Gross vehicle weight:	7490 kg
Steering type:	left

Paint

LZ 1:	Cab	
	MB 9147	arctic white

Tyres

1st Axle:	2 x 215/75 R 17,5	D27M17 10
2nd Axle:	4 x 215/75 R 17,5	D27M77 10
Spare wheel:	1 x 215/75 R 17,5	D27M17 10

Standard equipment

AE1	Axle ratio i = 3.154 (HL2/4/8)
AJ7	Front axle 3.5 t
AL6	Rear axle H2, 6.2/7.2 t, crown wheel 325
B02	Anti-lock braking system (ABS)
BB5	Disc brakes on front and rear axle Dual-circuit full air brakes Load sensing brake system Automatic brake adjusting
C42	Stabiliser, rear axle, under frame
CL6	Steering LS 4 Stabilizer front axle Steering column bracket adjustable multi-function steering wheel
D25	Roof hatch/vent, roof
E82	Battery cover Antenna + kit for subsequent radio installation
F07	S cab
FN1	Distribution cockpit
FQ7	Stowage facility above windscreen, 2 compartments
FS9	Mirror on driver's side, electrically adjustable
FT8	Cab entrance, single-step Wide-angle exterior mirror on front passenger side Ramp mirror on co-driver's side Electrically adjustable rear view mirror, Wide angle mirror on driver's side, heated
GC4	Transmission G 56-6/6.29-0.78
HF2	Pollen filter Outside temperature gauge Driver Information System
K83	Main tank, 125 l, plastic
KJ1	Main silencer, right, side, on frame Side marker lights Headlamp unit, H7, with clear-lens look
MN6	Engine, 4-cyl. in-line, LA, 130kW (177hp), 2200rpm
QN2	Front spring, 3.2 t, parabolic Rear axle with twin-bellow air-suspension and ENR
R04	Wheel nut cap
RA6	Tapered rims, 6.00x17.5, for 215/75 R 17.5
SG1	Driver's seat, static, Isringhausen
TE1	Weight variant 7.49 t (3.2/4.6)
X57	Noise reduction measures, EC 96/20
XK3	Powertrain warranty, Gen. Terms/Con., 3 yrs/250000 km
XV8	Atego 2, New
ZZ3	Vehicle, for right-side traffic

Special equipment

A71	Differential lock, rear axle
B65	Compressed air dryer, heated
C95	Deletion, rear underride guard (EC)
CC9	Deletion, protection device, side
E21	Battery/batteries, higher capacity
E39	Automatic cutouts
FW1	Deletion, cab rear wall [siehe Seite 4]
FW2	Deletion, immobiliser (transponder)
GE1	Telligent automatic gearshift system
J04	Tachograph, version for China
JK2	Instrument cluster, graphics-capable display
K40	Tank-cap lock
K45	Screen, tank filler neck
KA2	Exhaust tailpipe, to centre of road
KE8	On-Board Diagnosis 1, with NOx check
KG0	Stainless-steel silencer with SCR cat. converter
KP1	AdBlue tank, 25 l
L90	Deletion, tail lights
M45	Alternator 28 V/100 A
M90	Charge air preheater, electric
MD9	Cruise control
MH3	Speed limiter, 120 km/h
MS4	BlueTec 4 (Euro IV)
N60	Engine takeoff, front
P97	Deletion, mudguards, rear
P98	Deletion, mudguard stays, rear
R60	Spare wheel carrier, provisional
R87	Spare wheel/spare wheel rim
S91	Deletion, co-driver's seat
X42	Labels/publications, English
Y11	Jack

